

Products by Type

Digital Panel Meters
Electronic Counters
Programmable Timers
Transmitters, 4-20 mA
Transmitters, Modbus
Large Digit Displays
Bar Graph Displays
Meter/Counter Options
Meter Accessories
Data Logging Systems
Serial-to-Analog
4-20 mA Loop Splitters

Meters by Application

DC Volts & Amps
AC Power Monitoring
Process Meters
Flow Rate Total Batch
Weight, Load, Stress
Frequency, Rate, RPM
Temperature Control
Resistance in Ohms
Pulse & Analog Totals
Timing Products
Position Length Speed
Mixing, Ratio, Sum
Remote Serial Display

Resource Pages

About Laurel
Price List (pdf)
Product Inquiry
Search Page
Product Literature
Manuals
Software Downloads
Setup Software
Web Links
Sitemap

88-PRO Loop Powered Process Meter

With 0.50" high LCD digits and detachable screw terminals.



Features

- Powered by 4-20 mA, 10-50 mA or 1-5 mA loop, with no need for additional power.
- Maximum 2.5 V voltage drop.
- Easy zero & span adjustment from rear of meter.
- 3 1/2 digit resolution (± 1999)
- Jumper-selectable dummy right-hand zeros for reading to ± 19990 or ± 199900
- Normal or inverted scaling.
- High-legibility 12.7 mm (0.50") digits.
- 1/8 DIN panel cutout, only 93 mm (3.66") required behind panel.
- Environmental protection to IP54 (NEMA-12) when panel mounted.
- High-quality plug-in screw terminals.
- Low cost.


Description

Loop powered. The 88-PRO Process Meter may be connected directly to a 4-20 mA, 10-50 mA or 1-5 mA current loop, with no need for additional power to the meter. This is because the meter is powered directly by the current loop, developing a maximum voltage drop of 2.5 V.

Readout in engineering units. By accepting 4-20 mA, 10-50 mA or 1-5 mA signals, the 88-PRO is compatible with a large number of industrial transducers and transmitters to display process variables such as temperature, pressure, flow, weight, pH, humidity etc. Zero and span are adjustable for direct readout in engineering units. There is an INVERT facility, so that an increasing input signal gives a reducing display, for example, 4-20 mA = 100.0 to 0.0. The 88-PRO also provides two jumper-selectable dummy right-hand zero to extend the maximum reading from the default of ± 1999 to ± 19990 or ± 199900 . This feature allows the display of large numbers, such as the weight of a truck in pounds. It also useful when the cost of a 4 1/2 or 5 1/2 digit meter may be too high

Easy to install and set up. The 88-PRO fits in a standard 1/8 DIN panel cutout and only requires 93 mm (3.66") behind the panel. This is less than for most process meters. There are only two signal connections: signal in and signal out. These are made via a detachable screw terminal connector. All range-selection jumpers as well as the meter's zero and span adjustments are from the rear of the meter, avoiding the need to open the case.

Attractive and easy to read. The fascia of the 88-PRO is attractively styled. The simple bezel will compliment your panel design. The lens protects all legends and markings, so repeated wipe-downs won't damage the lettering or display clarity. High contrast LCDs make these meters suitable for use in bright environments. The digits measure a full 12.7 mm (0.50").

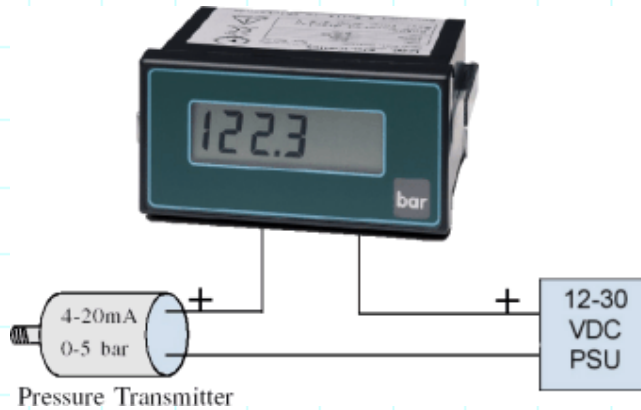


An application example. The 88-PRO loop-powered process meter is in series with 12-30 Vdc power to a two-wire 4-20 mA pressure transmitter, which measures the pressure at the bottom of a straight-sided tank. The meter's broad scaling capabilities allow it to be adjusted to display the volume of the tank. If necessary, one or two dummy right hand zeros could be added to display values up to 199900.

Specifications

Signal			
Range	4-20 mA	10-50 mA	1-5 mA
Effective resistance	125 ohms	50 ohms	500 ohms
Maximum voltage drop	2.5 V	2.5 V	2.5 V
Display			
Display range	±1999, ±19990, ±199900 (jumper-selectable)		
Display height	12.7 mm (0.50")		
Display type	High-contrast LCD		
Decimal point selection	Push-on jumpers		
Display update rate	3 / sec		
Open circuit response	Display blanks		
Decimal point selection	Push-on jumpers behind front panel		
Electrical			
Accuracy	± 0.1% of reading ± 1 count		
Resolution, max.	1 part in 2000		
Calibration method	Zero & span potentiometers		
CMRR	65 dB, 0-450 Hz		
Linear ranges	3-21 mA, 8-52 mA, 0.8-6 mA		
A-D conversion	Dual slope integration		
Integration period	100 ms		
Power	Derived from current loop with 2.5 V max drop		
Mechanical			
Bezel dimensions	48 x 96 mm (1.89" x 3.78"), H x W		
Panel cutout	45 x 92 mm (1.77" x 3.62"), H x W		
Depth behind panel	93 mm (3.66") including connector		

Width behind panel	98 mm (3.86") max.
Case material	Polycarbonate, UL rating 94V-0
Weight	100 g (3.5 oz)
Electrical connections	Detachable screw terminal connector
Environmental	
Operating temperature	-10°C to 50°C (14°F to 122°F)
Storage temperature	-20°C to 70°C (-4°F to 158°F)
Humidity	90% RH at 50°C (122°F), non-condensing

Mechanical

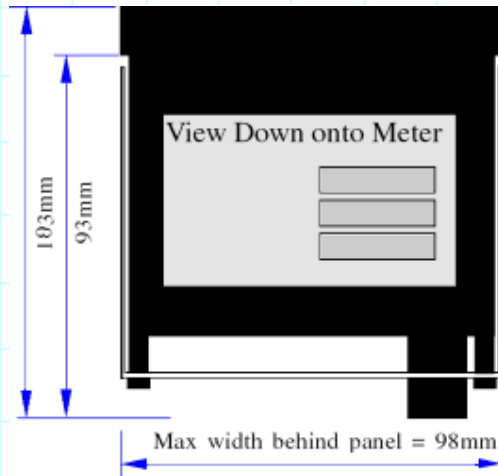

Panel Cutout
 45mm high, 92mm wide
 Tolerances +1mm, -0mm
 Bezel Size=48x96mm

Ordering Guide

88-PRO Loop Powered Process Meter

Select the buttons to build a model number in this format: **88-PRO, IPC**

		Quantity
		1
DPM Type	<input checked="" type="radio"/> 88-PRO 88-PRO Loop Powered Process Meter.	\$175
Add-on Options	<input type="checkbox"/> IPC Clear front panel cover sealed to NEMA 4X / IP65	\$40
	<input type="checkbox"/> BOX1 NEMA-4X wall-mount enclosure with 1/8 DIN cutout	\$140
	<input type="checkbox"/> BOX2 BOX1 plus IPC	\$180



Laurel Electronics, Inc.
 Industrial Instrumentation & Displays

3183-G Airway Avenue
 Costa Mesa, CA 92626, USA



Tel: (714) 434-6131
Fax: (714) 434-3766



Email sales@laurels.com

© 1996-2010 Laurel Electronics, Inc.