

4-20 mA & Serial Data Transmitter / Totalizer for 0-1 mA, 4-20 mA or 0-10V Process Signals



Features

- 0-1 mA, 4-20 mA or 0-10V process signal input, isolated
- Converts signal input to a scaled rate or totalized rate
- Selectable square root for differential flow
- Output accuracy maintained for narrow or wide spans
- 4-20 mA or 0-10V transmitter output, jumper selectable, isolated
- Analog output resolution 0.0015% of span (16 bits), accuracy $\pm 0.02\%$ of span
- RS232 or RS485 serial data output, half or full duplex, isolated
- Modbus RTU, Modbus ASCII or Laurel ASCII protocol
- Dual solid state relays for alarm or control, isolated
- Universal AC power, 85-264 Vac, or low voltage power, 10-48 Vdc or 12-32 Vac
- DIN rail mount case with detachable screw clamp connectors



Description

The Laureate process signal input transmitter and totalizer accepts 0-1 mA, 4-20 mA or 0-10V signals from flow meters and other transducers, such as watt meters, to track rate or totalized rate.

- **With a Standard Main Board**, the transmitter output can track rate (such as gallons per minute or watts) or totalized rate (such as gallons or kilowatt hours) whether the transducer output is linear or requires square root extraction (differential pressure flow transducers).
- **With an Extended Main Board**, the transmitter can also perform custom curve linearization (provided by a curvilinear spline fit with up to 180 data points), display 1/ rate (such as the time it takes a conveyor to pass through an oven), and perform batch control for repetitive fill operations. Such applications typically make use of optional dual solid state relays, which are available as options. External reset of totals is provided by a special connector.

The signal conditioner board of the transmitter converts the full-scale 0-1 mA, 4-20 mA or 0-10 V analog signal to a frequency of 10 kHz to 110 kHz. This frequency is determined by measuring period over a selected gate time (from 10 ms to 200 s) and taking the inverse of period. At the lowest frequency of 10 kHz and the minimum gate time of 10 ms, the transmitter is capable of 25 updates per second. Scaling is done mathematically. Totals are stored in nonvolatile memory in case of power loss.

Standard features of Laureate transmitters include:


- **4-20 mA, 0-10V or -10V to +10V analog transmitter output**, isolated, jumper-selectable and user scalable. All selections provide 16-bit (0.0015%) resolution of output span and 0.02% output accuracy of a reading from -99,999 to +99,999 counts that is also transmitted digitally. Output isolation from signal and power grounds eliminates potential ground loops.
- **Serial communications output**, isolated. User selectable RS232 or RS485, half or full duplex. Three protocols are user selectable: Modbus RTU, Modbus ASCII, or Laurel ASCII. Modbus operation is fully compliant with Modbus Over Serial Line Specification V1.0 (2002). The Laurel ASCII protocol allows up to 31 Laureate devices to be addressed on the same RS485 data line. It is simpler than the Modbus protocol and is recommended when all devices are Laureates.
- **Dual solid state relays**, isolated. Available for local alarm or control. Rated 120 mA at 130 Vac or 170 Vdc.
- **Universal 85-264 Vac power**. Low-voltage 10-48 Vdc or 12-32 Vac power is optional.

Easy Transmitter programming is via Laurel's Instrument Setup Software, which runs on a PC under MS Windows. This software can be downloaded from our website at no charge. The required transmitter-to-PC interface cable is available from Laurel (P/N CBL04).


Specifications

Analog Input	0-1 mA	4-20 mA	0-10 V
Input resistance Max current or voltage	1.00 kΩ 35 mA	50 Ω 70 mA	1.01 MΩ 600 V
Input Resolution Span Tempco Zero Tempco Accuracy at 25 \pm 1/2°C Read Rate	6 digits ±0.0025% R/°C ±0.0005 FS/°C ±0.005% FS ± 1 count 25/sec (typical)		
Analog Output			
Output Levels Compliance, 4-20 mA Compliance, 0-10V Output Resolution Output Accuracy Output Update Rate Output Isolation	4-20 mA, 0-20 mA, 0-10 Vdc, -10 to +10Vdc (user selectable) 10V (0-500Ω load) 2 mA (5 kΩ load) 16 bits (65,536 steps) 0.02% of output span 25/sec 250V rms working, 2.3 kV rms per 1 minute test		
Serial Communications (standard)			
Signal Types Data Rates Output Isolation Serial Protocols Modbus Modes Modbus Compliance Digital Addressing	RS232 or RS485 (half or full duplex) 300, 600, 1200, 2400, 4800, 9600, 19200 baud 250V rms working, 2.3 kV rms per 1 min test Modbus RTU, Modbus ASCII, Laurel ASCII RTU or ASCII Modbus over Serial Line Specification V1.0 (2002) 247 Modbus addresses. Up to 32 devices on an RS485 line with no repeater		
Transducer Excitation Output (standard)			
Jumper Selection 1 Jumper Selection 2 Jumper Selection 3	10V @ 60 mA, isolated to 50V from signal ground 5V @ 50 mA, isolated to 50V from signal ground 15V @ 60 mA, non-isolated		
Dual Relay Output (optional)			
Relay Type Load Rating	Two solid state relays, SPST, normally open, Form A 120 mA at 140 Vac or 180 Vdc		
Power Input			
Standard Power Low Power Option Power Frequency Power Isolation Power Consumption	85-264 Vac or 90-300 Vdc 10-48 Vdc or 12-32 Vac DC or 47-63 Hz 250V rms working, 2.3 kV rms per 1 min test 2W typical, 3W with max excitation output		
Mechanical			
Dimensions Mounting Electrical Connections	129 x 104 x 22.5 mm case 35 mm rail per DIN EN 50022 Plug-in screw-clamp connectors		
Environmental			
Operating Temperature Storage Temperature Relative Humidity Cooling Required	0°C to 55°C -40°C to 85°C 95% at 40°C, non-condensing Mount transmitters with ventilation holes at top and bottom. Leave 6 mm (1/4") between transmitters, or force air with a fan.		

Pinout

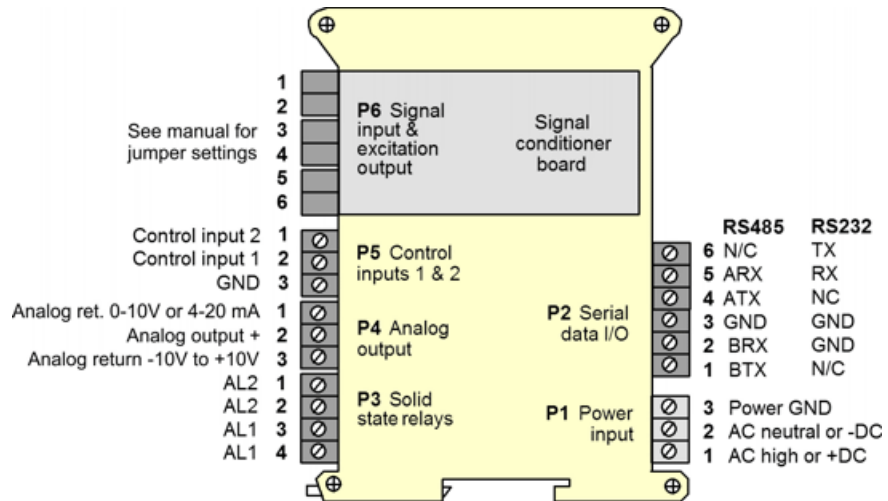

Mechanical

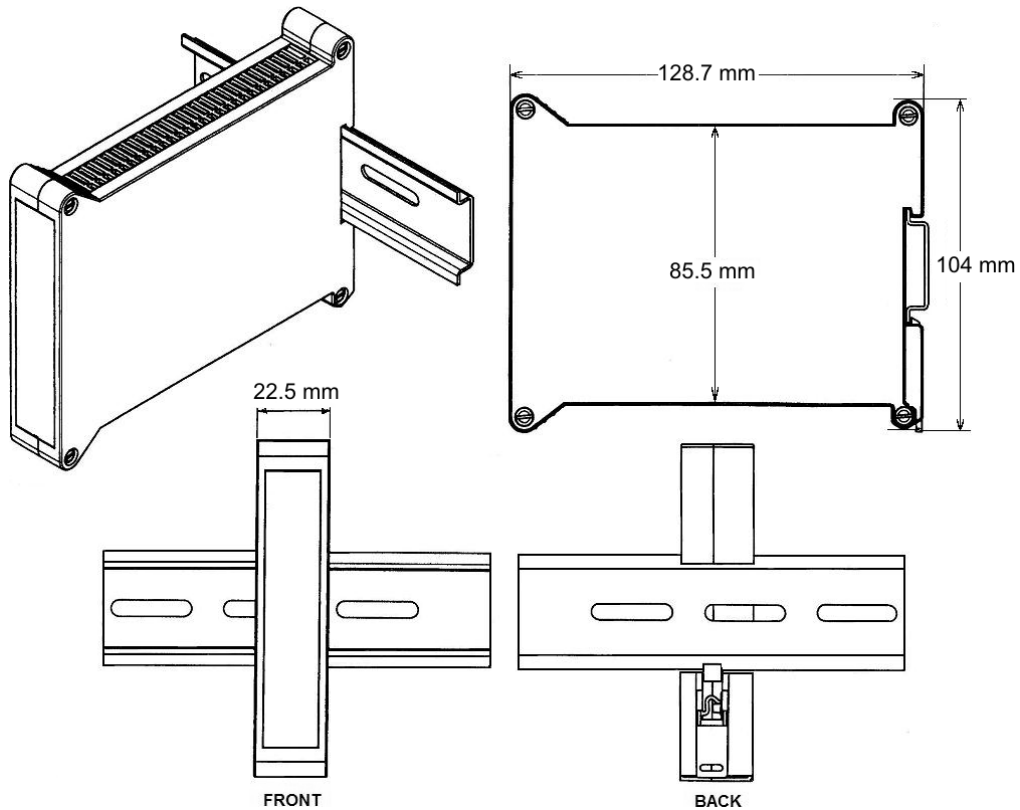

Ordering Guide

Create a model a model number in this format: **LT60VF1, CBL04**

Transmitter Type	LT Laureate 4-20 mA & RS485 Transmitter
Main Board	6 Standard Main Board 8 Extended Main Board <i>With Standard Main Board:</i> Rate, square root of rate, or totalized rate from differential pressure flow transducers with a DC output. <i>With Extended Main Board:</i> Above plus linearization of nonlinear inputs, batch operation, 1/rate (time).
Power	0 Isolated 85-264 Vac or 90-300 Vdc 1 Isolated 12-32 Vac or 10-48 Vdc
Input Type	VF1 V-to-F Converter, 4-20 mA VF2 V-to-F Converter, 0-1 mA VF3 V-to-F Converter, 0-10V Specify min input, min reading; max input, max reading.
Accessories	CBL04 RS232 cable, 7ft. Connects RS232 screw terminals of LT transmitter to DB9 port of PC. CBL02 USB to RS232 adapter cable. Combination of CBL02 and CBL04 connects transmitter RS232 terminals to PC USB port.