



MAGNA Series Large Digit Displays for Strain Gauge / Load Cell Input

Includes Excitation for Four 350-Ohm Load Cells in Parallel



Features

- Choice of 2-1/4", 4", 6" or 8" digit heights
- Choice of 4 or 6 digits with decimal points
- Choice of normal or outside viewing brightness
- Compatible with load cells from 0.5 mV / V to 4 mV / V
- Easily scaled to engineering units
- Filtering, last-digit rounding and tare for weighing
- Choice of panel mount, wall mount or suspension mount
- Choice of 95-264 Vac or 11-30 Vdc power
- Sealed to NEMA-4 (IP65)
- Only 3.0" (75 mm) deep
- Programmable from front panel
- Optional dual 5A relay outputs, analog output, serial I/O

Description

MAGNA Series Strain Gauge / Load Cell Input Large Digit Displays feature a signal conditioner for use with 0.5 mV / V to 4 mV / V load cells, an isolated excitation capable of powering up to four 350-ohm bridges in parallel at 10V and 120 mA, and easy scaling for display in engineering units such as lbs or kg. Standard feature include digital signal filtering with a time constant adjustable from 0 to 25 sec, selectable last-digit rounding of 1, 2, 5, 10, 20 and 50, and 10-point custom curve linearization.

Viewing distances up to 320 feet (100 m) are achieved with oversize digits. A rule of thumb is that viewing distance in feet is 40 times digit height in inches, or in metric terms, that viewing distance in meters is digit height in millimeters divided by 2.


Four digit heights are available: 57 mm (2-1/4"), 102 mm (4.0"), 150 mm (5.9"), and 200 mm (7.9"). Solid segments are used for normal brightness 2.2" and 4.0" digits. Individual 5 mm LED pixels are used

for larger digits and outdoor brightness versions. The number of digits can be 4 or 6.

Indoor or Outdoor Viewing: MAGNA Series Displays with normal brightness LEDs can be read across an entire plant floor to keep workers informed without leaving their work area. Displays with outdoor brightness LEDs can be read across an industrial yard, parking lot or roadway, for example to display vehicle load. Available mounting options are panel mount, wall mount and suspension mount.

Environmental sealing to IP65 (NEMA-4X) is standard. Available Options are dual 5A relays, an analog output, an RS-232 or RS485 serial data output, and 95-264 Vac or 11-30 Vdc power.

Intuitive Setup is normally provided by means of built-in front panel switches, which can be locked. It is also possible to remotely wire four pushbuttons to the display.

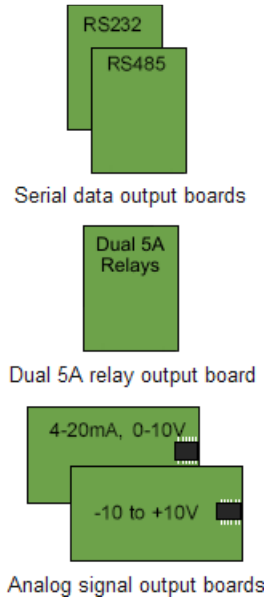

Specifications

Approvals	
Types	Produced to IPC 610 Class 2 Standard UL ISO9001:2008 QA
Strain Gauge / Load Cell Input	
A/D Converter	20-bit resolution
Signal Gain	Suitable for 0.5 mV / V to 4 mV / V load cells
Input Resistance	> 10 MΩ
Accuracy	± 0.05% of range.
Tempco, Scale	± 25 ppm/°C
Tempco, Offset	± 30 ppm/°C
Excitation Output	Isolated 10V up to 120 mA to power up to four 350Ω load cells in parallel


Display	
Number of Digits	4 or 6
Digit Height	57 mm (2-1/4"), 102 mm (4.0"), 150 mm (5.9"), or 200 mm (7.9")
Digit Color	Red
Brightness	Variable
Numeric Format	8.8.8.8. or 8.8.8.8.8.8.
Display Update Rate	10 readings/second
User Controls	
Scaling	Digital direct or theoretical scaling with scale & offset.
Filtering	Digital filtering, time constants adjustable from 0 to 25 sec.
Rounding	Selectable last-digit rounding of 1, 2, 5, 10, 20, 50 units.
Linearization	Up to 10 points, direct or theoretical calibration.
Logic Inputs	
Front Panel Controls	Four buttons to set time, date, alarms, etc.
Logic Functions	Three logic inputs, individually configurable for Hold, Reset, Tare, Peak / Valley, Net/Gross, Memory Address.
Logic Levels	Normally open, NPN or contact closure input to activate. 5V open circuit, 1 mA switched current.
Power	
AC Power (standard)	100-240 Vac
DC Power (option)	11-30 Vdc
Max Consumption	30 VA
Analog Output Option	
Output Levels	0-20 / 4-20 mA into 0 to 500Ω, 0.4 μA resolution. 0-10V into loads > 600Ω, 0.2 mV resolution. -10 to +10V into loads > 600Ω, 0.4 mV resolution.
Resolution	16 bits
Accuracy	0.1% of range
Stability	50 ppm/°C
Output Isolation	Isolated from input and power
Scaling	Digitally scalable
Special Features	Forward or reverse action possible. Can be set to operate from net or gross value.
Alarm Output Option	
Relay Type	2 Alarms rated 5A, 250VAC, SPDT
Special Features	Adjustable hysteresis In-flight compensation facility. Energize or de-energize on trip. Adjustable timers to set energize and de-energize delays. Can also be set to pulse for applications needing less than 100% duty cycle. In-band and out-of-band alarm function. Manual and automatic in-flight compensation. Can be set to operate from net or gross value.
Serial Data Output Option	
Output Types	RS232 or RS485, addressable, on demand or continuous output.
Special Features	Can include time and date with RTC option fitted. Can be set to operate from net or gross value.
Environmental	
Storage Temperature	-20°C to +70°C
Operating Temperature	0°C to 50°C, non-condensing -25°C to 50°C, non-condensing, with MHTR AC heater option
Sealing	NEMA-4 (IP65) standard, all-round
Mounting	Wall mount, suspension mount, panel mount



Number of Digits & Case Dimensions



Signal Type	4 Digits	6 Digits
Process Signal	<i>8888</i>	<i>888888</i>
Case width x height	4 Digits	6 Digits
57 mm (2.2") digits	279 x 155 mm (11.0" x 6.1")	376 x 155 mm (14.8" x 6.1")
102 mm (4.0") digits	434 x 196 mm (16.7" x 7.7")	616 x 196 mm (24.3" x 7.7")
150 mm (5.9") digits	514 x 247 mm (20.2" x 9.8")	744 x 248 mm (29.3" x 9.8")
200 mm (7.9") digits	664 x 298 mm (26.1" x 11.7")	984 x 298 mm (38.7" x 11.7")
Case depth	75 mm (3.0")	

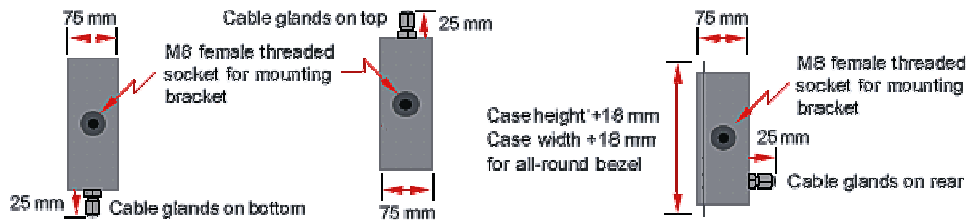

Notes: Models with 57 mm (2.2") digits, 4 digits and 4 relays require the larger 6-digit case.
 For panel mount versions, add 18 mm (0.7") to case width and height for the bezel and 25 mm (1.0") for cable glands in back of the case.

Ordering Guide

Create a model a model number in this format: **M24-MLC-MMT2**

Base Model	M24 2" (57 mm) digit height, 4 digits. Display to 8.8.8.8. M24UM 2" (57 mm) digit height, 4 digits. Display to 8.8.8.8. (UM includes needed extra width to fit relay, analog or serial output options) M26 2" (57 mm) digit height, 6 digits. Display to 8.8.8.8.8.8. M44 4" (102 mm) digit height, 4 digits. Display to 8.8.8.8. M46 4" (102 mm) digit height, 4 digits. Display to 8.8.8.8.8.8. M64 6" (150 mm) digit height, 4 digits. Display to 8.8.8.8. M66 6" (150 mm) digit height, 6 digits. Display to 8.8.8.8.8.8. M84 8" (200 mm) digit height, 4 digits. Display to 8.8.8.8. M86 8" (200 mm) digit height, 6 digits, Display to 8.8.8.8.8.8.
Signal Input (one required, select one)	MLC Load cell
Analog Output Board (one optional)	MAO1 4-20 mA MAO2 0-10V MAO3 -10V to +10V
Relay Output Board (one optional)	MRL1 Two 5A, 250 Vac relays MRL2 Four 5A, 250 Vac relays
Serial Data Output Board (one optional)	MO232 RS232 MO485 RS485 with Modbus ASCII
Case and Mounting (one required)	MT1 Panel mount, black NEMA-4 (IP65) case MT2 Wall mount, black NEMA-4 (IP65) case MT3 Suspension mount, black NEMA-4 (IP-65) case
Meter Modifying Options (not shippable separately from meter)	MRDLV Daylight viewing brightness instead of normal indoor brightness MHTR AC heater for operation down to -25°C (-13°F) MPS2 11-30 Vdc power instead of normal 85-265 Vac power
Add-on Option (shipped separately from meter)	MRP MAGNA remote programmer (wire connection to display unit)